


## 1811 CL LED Display Case Lights

Part Number: 61811 CL\*

### CAUTION

- This product must be installed in accordance with local and national electric codes by a qualified electrician (The manufacturer assumes no responsibility for improper installation or application of this lighting fixture)
- All supply wires must be suitable for 90°C
- Turn off all electricity before installation or servicing
- This **“FIXTURE MUST BE GROUNDED”**
- Verify a secure connection at the mounting brackets
- No Serviceable Parts

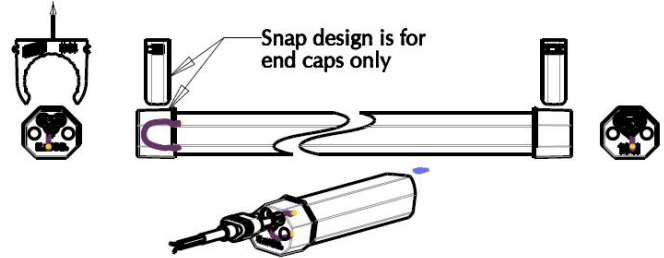

| Through Connector | Connector Cap | Power Cap |
|-------------------|---------------|-----------|
|                   |               |           |

### DIRECTIONS

1. Unpack fixture and remove all packaging
2. Mount fixture using supplied brackets
3. Snap fixture into place using even force
4. Attach white wire to neutral wire of supply
5. Attach black wire to power wire of supply
6. Attach green wire to ground
7. Plug in power cord and turn on breaker

### Notes:

- MAX Feed through current = 4 AMPs
- Use through connector for optional adding/ daisy chaining of fixtures
- UL approved for use inside, Refrigerated/Non-Refrigerated Cabinets, E333932
- Damp location approved



| Part No.      | Description                           | AMPS at 120 V | AMPS at 240 V | AMPS at 277 V | Qty/ Carton | Weight |
|---------------|---------------------------------------|---------------|---------------|---------------|-------------|--------|
| 61811CL000120 | LED, 12 in., 6 W, 120-277 V, 600 LM   | 0.05          | 0.025         | 0.022         | 25          | 19 lb  |
| 61811CL000180 | LED, 18 in., 8 W, 120-277 V, 800 LM   | 0.07          | 0.033         | 0.029         | 25          | 23 lb  |
| 61811CL000240 | LED, 24 in., 12 W, 120-277 V, 1200 LM | 0.10          | 0.050         | 0.043         | 25          | 28 lb  |
| 61811CL000360 | LED, 36 in., 18 W, 120-277 V, 1800 LM | 0.15          | 0.075         | 0.065         | 25          | 37 lb  |
| 61811CL000480 | LED, 48 in., 24 W, 120-277 V, 2400 LM | 0.20          | 0.100         | 0.087         | 25          | 48 lb  |