
INSTALLATION INSTRUCTIONS



Maximount® Vinyl Strip Curtain System

Part Number: 00MM

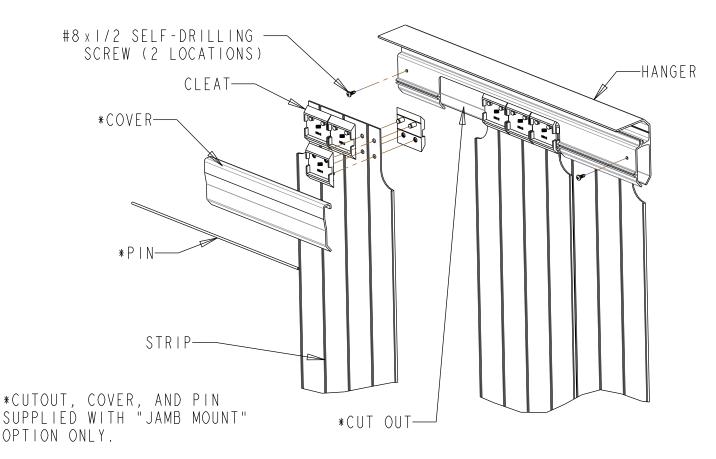

The Maximount hanger can be mounted against the wall or within the opening.

DIRECTIONS

- Drill clearance holes in the hanger for the mounting fasteners. Use the drill locator groove, and space holes a maximum of 24" apart.
- Transfer the holes in the hanger onto the mounting surface. Make sure the hanger is level and centered within the opening.
- Mount the hanger using fasteners suitable for the material of the door frame. Fasteners must be able to support the weight of the system and the force exerted by traffic through the curtain.
- 4. Insert strips, with cleats installed, into end of hanger. If the optional cover(s) are included; the strips may be loaded through the cutout in the hanger. To secure, install the cover and slide the pins into the slots of the hanger.
- 5. Verify that the strips are centered over the opening and the strips are properly overlapping. (The bottom of the strip should be clear of the floor. Trim if necessary)
- 6. Secure the strips by threading #8 x 1/2" self-drilling screws at each end.

Note: We recommend cleaning vinyl curtains with soap and water on a regular basis. For stubborn stains use a 5% ethanol (Windex[®] type product) and water. Wipe curtains dry. Mop up any residual water off the floor.