

0488 Series Walk-In Push Bar Inside Release

Part Number: 10488*

FEATURES

- Large hands-free contact area to open door
- Crossbar design provides simple low-effort operation
- Ergonomic design provides simple low-effort operation
- Stainless steel and aluminum materials
- Accommodates left and right handed doors
- Works with Kason latch models 0056, 5656, 5688, 0058, 0077, 0078, and 0778 (see Mounting)
- Retrofit plate mounting provides secure attachment to walls without backing material in the door

MATERIALS

- **Cross bar:** 304 stainless steel
- **Mounting brackets:** 304 stainless steel
- **Push rod:** 303 series stainless steel
- **Cover:** Die-cast aluminum
- **Pivot arm:** Die-cast aluminum
- **Hardware:** Stainless steel
- **Pin:** 304 stainless steel
- **Springs:** Music wire
- **End caps:** Black polyethylene

MOUNTING

- For mounting on new doors with structural backing plates (not included), that are also appropriate for 1/4" diameter stainless steel fasteners. Consult Kason Engineering Department for field retrofitting instructions.
- Mounting of 0488AG is in vertical orientation on door to match the dual latch center-to-center distance



DESIGN CRITERIA

- **Temp range:** -40°F to 150°F (-40°C to 65°C)
- Cycle tested to 250,000 cycles
- Designed for 1/4" mounting screws
- Accommodates left and right handed doors

Part No.	Latches	Door Thickness	Rod Length	Qty./Carton	Wgt./Carton
10488C00318300	0058, 0077, 0078, 0778	3"	6.46"	1	5.98 lb (2.71 kg)
10488C00318400	0058, 0077, 0078, 0778	4"	7.46"	1	6.04 lb (2.74 kg)
10488C00318500	0058, 0077, 0078, 0778	5"	8.46"	1	6.09 lb (2.76 kg)
10488C00318600	0058, 0077, 0078, 0778	6"	9.46"	1	6.14 lb (2.79 kg)
10488A00318400	0056, 5656	4"	8"	1	6 lb (2.7 kg)
10488AG0317400	5688	4"	8"	1	7.2 lb (3.27 kg)
10488AG0318400	5688	4"	8"	1	7.7 lb (3.49 kg)
10488AG0319400	5688	4"	8"	1	9.2 lb (4.17 kg)



U.S. Patent 11,193,311

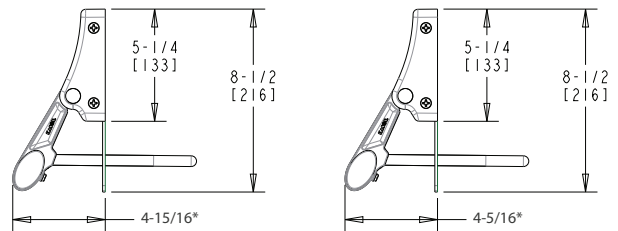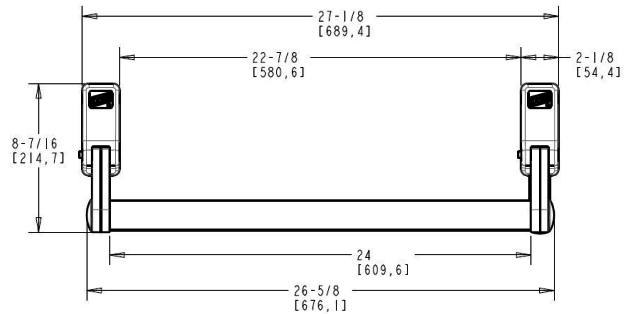

* 0488A, 0488AG

* 0488C

0488CR Walk-In Push Bar Inside Release Retrofit Kit

